

# BST8135-12-RJ45

## 800MHz-1000MHz RF-Optical Transceiver

REV 1.0

### 1 Feature

- ◆ High linear analog PD and FP laser
- ◆ With low noise and high linear gain power amplifier
- ◆ With APC and protect circuit for laser
- ◆ With AGC function
- ◆ Build-in Bi-Di component
- ◆ +9V~+12V Single power supply
- ◆ RS232 /RS485 control interface
- ◆ -20°C~+70°C Operating Temperature



### 2 Application

- ◆ Optical Repeater for CDMA/GSM
- ◆ Broadband RF Wireless

### 3 General

The BST8135-12-RJ45 is a low noise RF fiber optical transceiver designed for CDMA,GSM network and broadband RF wireless up link/down link applications, respectively. Each pair consists of a master and a slave modules, the link from master to slave is called down link, from slave to master as up link. In down link a 1550nm DFB-LD is selected as transmitter and a high linear analog PD as optical signal receiver, In up link a 1310nm FP-LD is selected to transmit the optical signal and a high linear analog PD as optical signal receiver. These modules can be used for 20km applications and they are fully compliant with the latest issue of Bellcore GR-253-CORE.

### 4 Performance Specifications

#### 4.1 Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit	Comments
Input Voltage	-	9	15	V	
input RF power			10	dBm	
Fiber Bending Radius	R	30		mm	

#### 4.2 Recommended Operation conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Comments
Operating Temperature	T <sub>op</sub>	-20		+70	°C	
Storage Temperature	T <sub>stg</sub>	-40		+85	°C	

## E-O and O-E Characteristics

### 4.3.1 Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Optical Wavelength	$\lambda$	1290	1310	1330	nm	slave
Average Optical Output Power	Po	2	4	5	dBm	
Optical Return Loss	RL	40			dB	
Optical Isolator	Iso	25			dB	


### 4.3.2 Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Condition
Power Supply	V <sub>cc</sub>		12		V	
Current Consumption	I <sub>cc</sub>			300	mA	
Bandwidth		800		1000	MHz	
Max Gain	G	-1	0	+1	dB	
AGC control points			4		dBm	
AGC range			20		dB	
Link Gain	G	+13	15	+17	dB	
Response Flatness@ any 20MHz		0.5			dB	
Input ALC control range		-5	0	5	dB	
Input RFpower detection range		-25		10	dB	BST8135-12-R J45
Output RFpower detection range		-25		10	dB	BST8130-12-R J45
Data Rate			19200			bps
Output Noise Floor				-130	dBm/Hz	optical no loss
Transmit No Optical Alarm		-3			dBm	Software Settings
Receive No Optical Alarm		-16			dBm	Software Settings
OIP3		-60			dBc	2ch/ch/-3dBm
RF Isolation		65			dB	optical no loss
VSWR				1.4		
RF Impedance			50		$\Omega$	
FSK Frequency			433.792		MHz	

#### 4.3.3 The connector


Optical connector	FC/APC
RF connector	SMA-50KFD

#### 5 Pin Definitions (DB9-F connector)

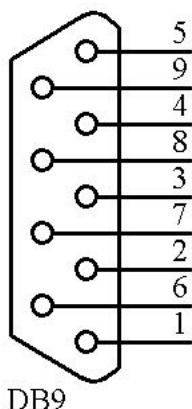

PIN	DEFINE	BST8130-12-RJ45	BST8130-12-RJ45
1	GND		GND
2	VCC		+9V
3	A		RS485
4	B		RS485
5	Alarm	Optical Alarm: T/R, TTL High level alarm	
6	TX+	100Base-TX Standard Ethernet interface	
7	TX-	100Base-TX Standard Ethernet interface	
8	RX+	100Base-TX Standard Ethernet interface	
9	RX-	100Base-TX Standard Ethernet interface	

## 6 Package Information ( Unit:mm)

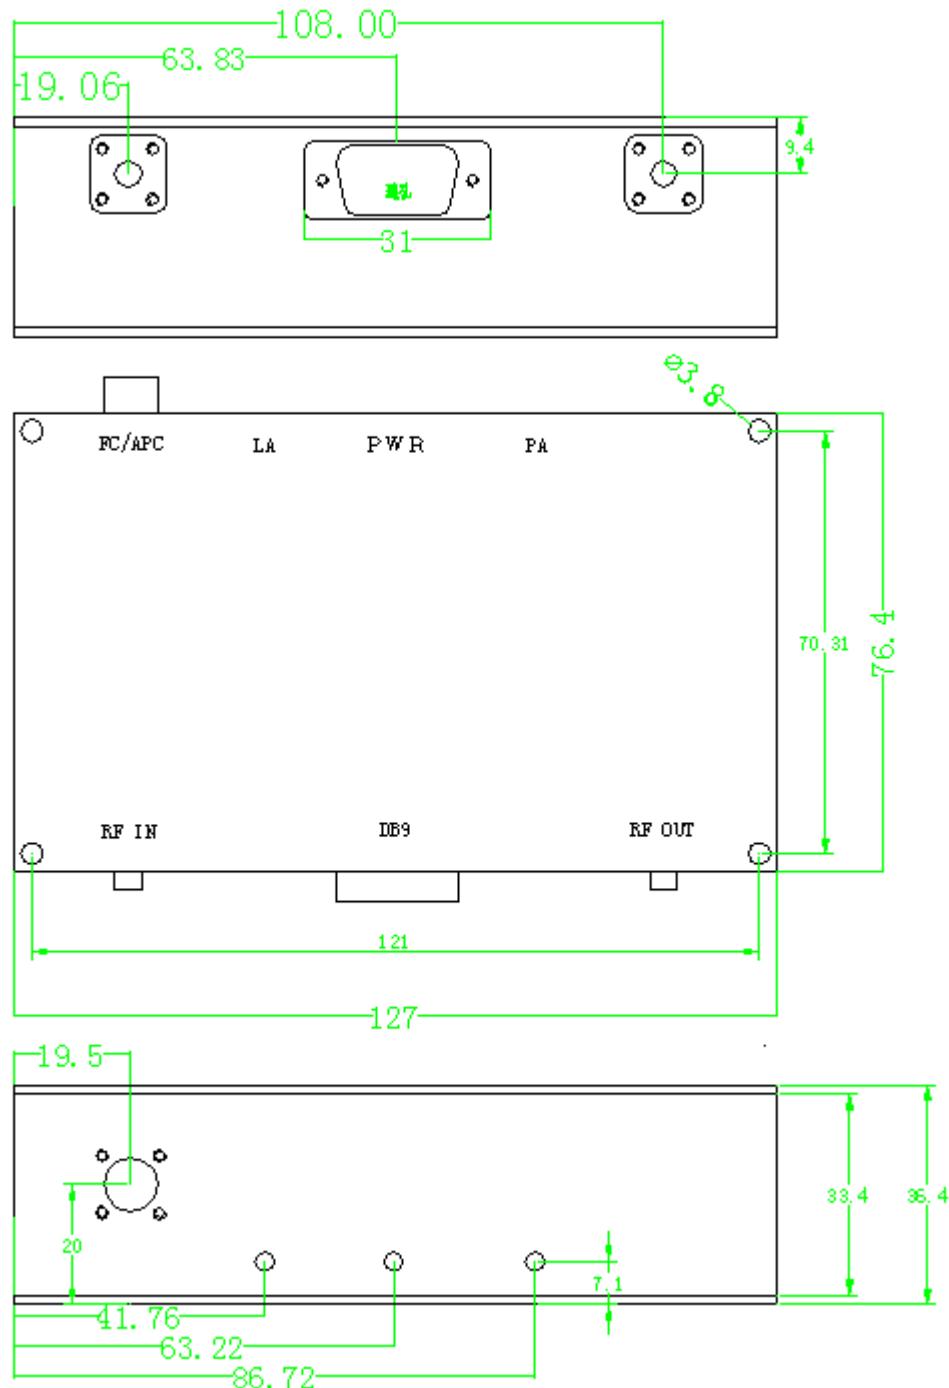

## 7 Specification for Environmental Protection

This product has a quality of "Green product", all raw materials are avirulence and have no environmental impact, apply new technology, strictly control the manufacturing process, the finished products do not contain any hazardous chemical substances regulated by RoHS, 2002/95/EC, or the trace element impurity concentration of banned substances is less than RoHS.